


SEL STYLE EXTENSION

DIMENSIONS		
	SEL 18	SEL 24
A	24"	30"
B	18"	24"



SEL 18
EXTENSIONS AVAILABLE
IN 3", 6", 12" AND 24"
SECTIONS

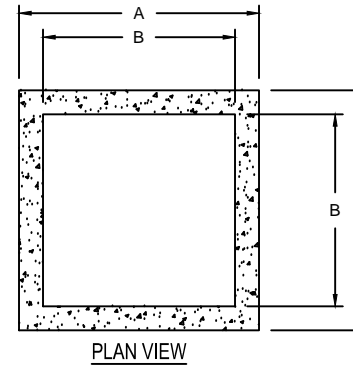

SEL 24
EXTENSIONS AVAILABLE
IN 3", 6", 12" AND 24"
SECTIONS

NOTES:

1. CONCTETE TYPE II PORTLAND CEMENT ASTM C 260-86, SIX SACK READY MIX. MINIMUM COMPRESSIVE STRENGTH 3,000 PSI AT 28 DAYS
2. No. 3 REINFORCING BAR ASTM A 615, GRADE 40.
3. SECONDARY REINFORCING: COLLATED FIBERILLATED POLYPROPLYENE FIBER.
4. INTERIOR SURFACES UNCOATED UNLESS COATING IS SPECIFIED OR REQUESTED.
5. CONCRETE INSERT ANCHORS ARE OPTIONALLY AVAILABLE TO PROVIDE FOR POSITIVE CONNECTION OF CAST IRON MANHOLE COVERS TO EXTENSIONS INSERTS TO BE ZINC ALLOY FOR CORROSION RESISTANCE TYPICAL FOR FOUR PLACES
6. EXTENSION SECTIONS LOCKED TOGETHER WITH 1/2" DEEP SEALABLE LOCKING DEPRESSION

PC-SEL
MANHOLE EXTENSIONS
SCALE: 1/2"=1'-0"



Sheet No.

REF.1131 REV. 05/08/2014