



**PLAN VIEW**

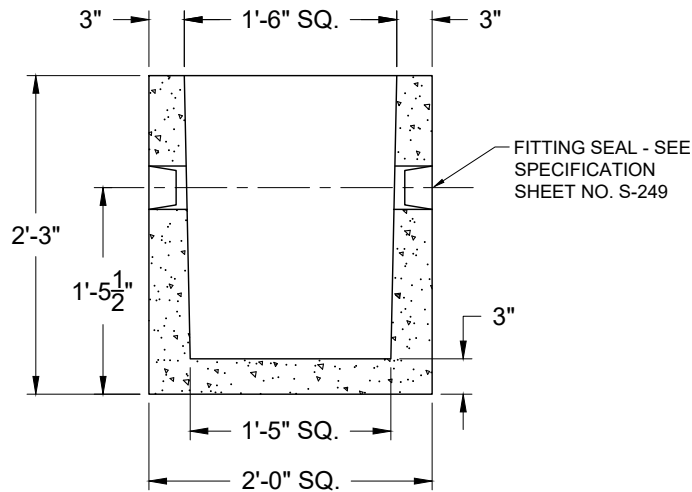

**SECTIONAL VIEW**

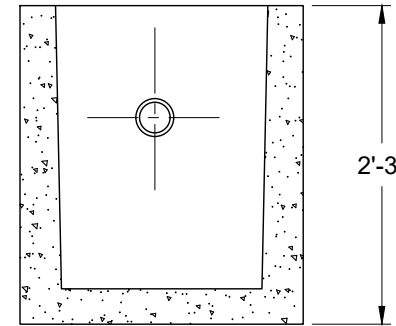

**SIDE VIEW**

**NOTES:**

- 1- SAMPLE BOXES MAY BE FITTED WITH VARIOUS COVERS. CHECK WITH FACTORY WHEN PLACING ORDER.
- 2- CONCRETE TYPE II PORTLAND CEMENT ASTM, C-260-86, SIX SACK READY MIX, MINIMUM COMPRESSIVE STRENGTH IS 3,000 PSI AT 28 DAYS.
- 3- NO.3 REINFORCING BAR - ASTM A-615, GRADE 40.
- 4- SECONDARY REINFORCING: COLLATED FIBERLLATED POLYPROPYLENE FIBER.

**Pro-Cast**  
PRODUCTS INC.  
27417 E. Third St., Highland, CA 92346  
909-793-7602 phone 909-793-1283 fax  
www.procastproducts.com

**DESCRIPTION:**

**18" IN-LINE  
SAMPLE BOX**

**DESIGN SPECIFICATIONS**

**DESIGNED FOR  
H-20 LOADING**

WITH DRY SOIL CONDITIONS (WATER LEVEL BELOW TANK). SUITABLE SUB-BASE BEDDED WITH GRANULAR MATERIAL SHALL BE PREPARED TO HANDLE ANTICIPATED LOADS. FOR COMPLETE DESIGN AND PRODUCT INFORMATION, PLEASE CONTACT PRO-CAST PRODUCTS.

PRO-CAST PRODUCTS RESERVES THE RIGHT TO MAKE CHANGES TO PRODUCT DESIGN AND/OR DIMENSIONS WITHOUT NOTICE. PLEASE CONTACT PRO-CAST PRODUCTS WHENEVER NECESSARY FOR CONFIRMATION OR ADVICE ON PRODUCT DESIGN.

**NOTES: REF. DWG. #1128**

|                    |                       |
|--------------------|-----------------------|
| <b>SCALE:</b>      | <b>NOT TO SCALE</b>   |
| <b>DRAWN BY:</b>   | <b>TPC 12/03/2018</b> |
| <b>REVISED BY:</b> |                       |
| <b>CHECKED BY:</b> |                       |

**DRAWING NO.**

**CB2**