DESCRIPTION: 3750 THRU 4500 GALLONS H-20 TRAFFIC RATED

DESIGN SPECIFICATIONS

DESIGN LOAD: H-20 TRAFFIC RATED

WITH DRY SOIL CONDITIONS (WATER LEVEL BELOW TANK) SUITABLE SUB-BASE BEDDED WITH GRANULAR MATERIAL SHALL BE PREPARED TO HANDLE ANTICIPATED LOADS. FOR COMPLETE DESIGN AND PRODUCT INFORMATION. PLEASE CONTACT PRO-CAST PRODUCTS.

PRO-CAST PRODUCTS RESERVES THE RIGHT TO MAKE CHANGES TO PRODUCT DESIGN AND/OR DIMENSIONS WITHOUT NOTICE. PLEASE CONTACT PRO-CAST PRODUCTS WHENEVER NECESSARY FOR CONFIRMATION OR ADVICE ON PRODUCT DESIGN.

NOTES:

- 1. NOT USED
- 2. REFER TO SPECIFICATION SHEET NOS. S-251 & S-252
- 3. REFER TO SPECIFICATION SHEET NO. S-201 4. REFER TO SPECIFICATION

SHEET NO. S-250

products folder\new stan.
- updated - dec 2024.dwg


g:\3 - standard p 2024\clarifiers - u


SCALE: DO NOT SCALE DRAWN BY: TPC 12.20.2024 REVISED BY:

CHECKED BY:

DRAWING NO.

C-003

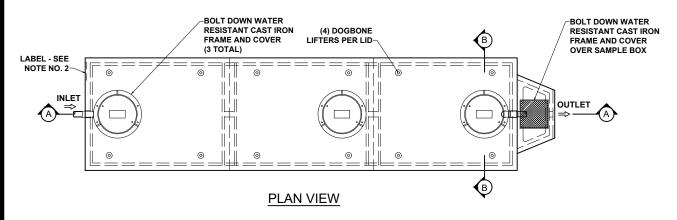

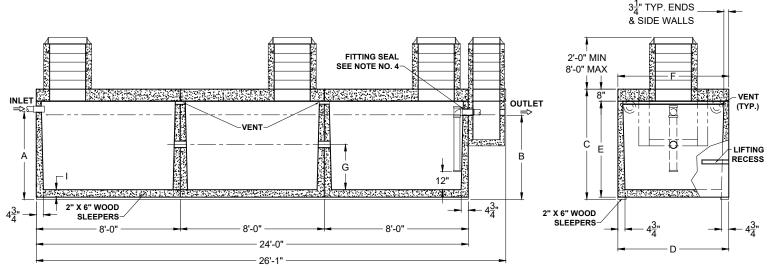

SECTION THRU "A-A"

SECTION THRU "B-B"

ALL DIMENSIONS ARE IN INCHES & WEIGHTS IN LBS - (RISER WT. NOT INCLUDED)											EXCAVATION SPECIFICATIONS			
MODEL	A	В	С	D	E	F	G	Н	ı	APPROX. WEIGHT	LENGTH	WIDTH	BELOW INLET	TANK HEIGHT
PC C-3-3750-HD	59	57	72	74	64	74	29 1/4	50 1/2	4 1/2	47,175	29'-0"	9'-2"	4'-11"	6'-2"
PC C-3-4500-HD	62 1/2	60 1/2	75 1/2	85	67 1/2	85	30 3/4	53 1/2	5	55,035	29'-0"	10'-1"	5'-2 1/2"	6'-5 1/2"