


PLAN VIEW

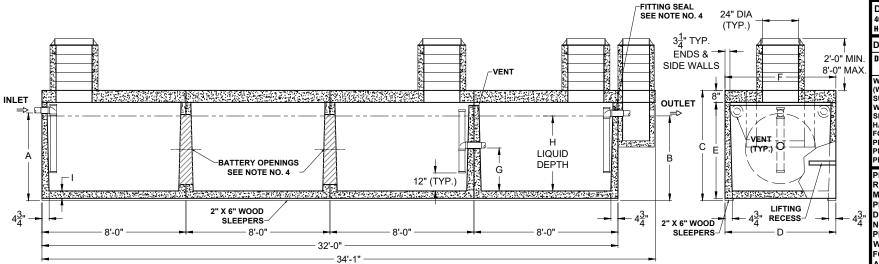

SECTION THRU "A-A"

SECTION THRU "B-B"

ALL DIMENSIONS ARE IN INCHES & WEIGHTS IN LBS - (RISER WT. NOT INCLUDED)										EXCAVATION SPECIFICATIONS					
														BELOW	TANK
MODEL	Α	В	С	D	E	F	G	Н	ı		WEIGHT	LENGTH	WIDTH	INLET	HEIGHT
PC G-4-4000-HD	50	48	63	74	55	74	24 3/4	41 1/2	4 1/2		58,040	37'-0"	9'-2"	4'-2"	5'-5"
PC G-4-5000-HD	59	57	72	74	64	74	29 1/4	50 1/2	4 1/2		62,900	37'-0"	9'-2"	4'-11"	6'-2"
PC G-4-6000-HD	62 1/2	60 1/2	75 1/2	85	67 1/2	85	30 3/4	53 1/2	5		73,380	37'-0"	10'-1"	5'-2 1/2"	6'-5 1/2"



PRODUCT NAME: GREASE INTERCEPTOR

DESCRIPTION: 4000 THRU 6000 GALLONS H-20 TRAFFIC RATED

DESIGN SPECIFICATIONS

DESIGN LOAD: H-20 TRAFFIC RATED

WITH DRY SOIL CONDITIONS
(WATER LEVEL BELOW TANK).
SUITABLE SUB-BASE BEDDED
WITH GRANULAR MATERIAL
SHALL BE PREPARED TO
HANDLE ANTICIPATED LOADS.
FOR COMPLETE DESIGN AND
PRODUCT INFORMATION,
PLEASE CONTACT PRO-CAST
PRODUCTS.

PRO-CAST PRODUCTS
RESERVES THE RIGHT TO
MAKE CHANGES TO
PRODUCT DESIGN AND/OR
DIMENSIONS WITHOUT
NOTICE. PLEASE CONTACT
PRO-CAST PRODUCTS
WHENEVER NECESSARY
FOR CONFIRMATION OR
ADVICE ON PRODUCT
DESIGN.

NOTES:

- 1. (NOT USED)
- 2. REFER TO SPECIFICATION SHEET NOS. S-251 & S-252
- 3. REFER TO SPECIFICATION SHEET NO. S-201
- 4. REFER TO SPECIFICATION SHEET NO. S-250

0112211101	•					
SCALE:	DO NOT SCALE					
DRAWN BY:	TPC	12.20.2024				
REVISED BY:						
CHECKED BY:						

G-004

;\3 - standard products folder\new standard product drawings\grease interceptors\grease intern indased - dec 2024 forces e intercentore - indased - dec 2024 fund