


PLAN VIEW

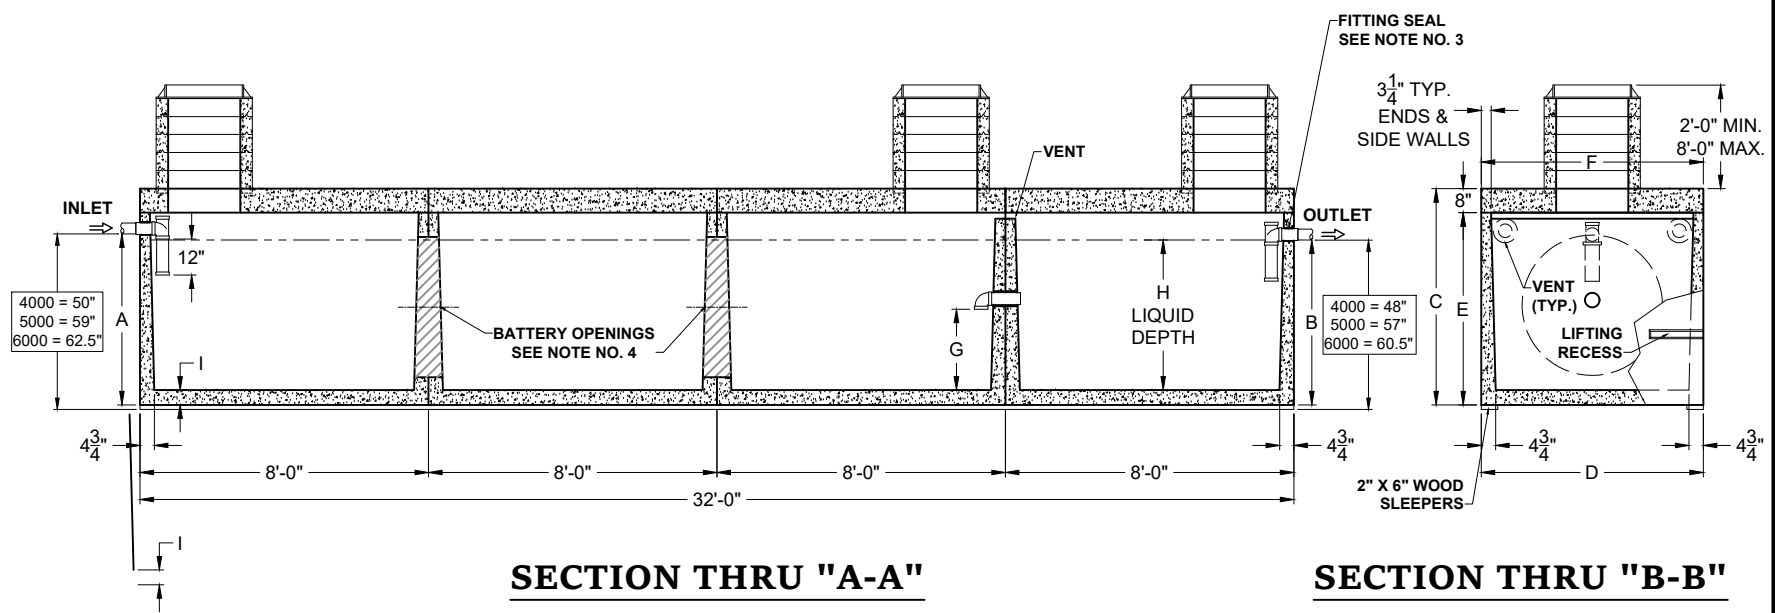

SECTION THRU "A-A"

SECTION THRU "B-B"

PRODUCT NAME:
SEPTIC TANK

DESCRIPTION:
4000 THRU 6000 GALLONS
WITH THREE MANHOLES/RIISERS

DESIGN SPECIFICATIONS
DESIGN LOAD: H2O LOADING

WITH DRY SOIL CONDITIONS (WATER LEVEL BELOW TANK). SUITABLE SUB-BASE BEDDED WITH GRANULAR MATERIAL SHALL BE PREPARED TO HANDLE ANTICIPATED LOADS. FOR COMPLETE DESIGN AND PRODUCT INFORMATION, PLEASE CONTACT PRO-CAST PRODUCTS.

PRO-CAST PRODUCTS RESERVES THE RIGHT TO MAKE CHANGES TO PRODUCT DESIGN AND/OR DIMENSIONS WITHOUT NOTICE. PLEASE CONTACT PRO-CAST PRODUCTS WHENEVER NECESSARY FOR CONFIRMATION OR ADVICE ON PRODUCT DESIGN.

- NOTES:**
1. REFER TO SPECIFICATION SHEET NO. S-201
 2. REFER TO SPECIFICATION SHEET NOS. S-251 & S-252
 3. REFER TO SPECIFICATION SHEET NO. S-249
 4. REFER TO SPECIFICATION SHEET NO. S-101.

SCALE: 3/16" = 1'-0"
DRAWN BY: TPC 09/14/2017
REVISED BY: JPL 04/25/2023
CHECKED BY:

DRAWING NO.
S-011

ALL DIMENSIONS ARE IN INCHES & WEIGHTS IN LBS - (RISER WT. NOT INCLUDED)										EXCAVATION SPECIFICATIONS				
MODEL	A	B	C	D	E	F	G	H	I	WEIGHT	LENGTH	WIDTH	BELOW INLET	TANK HEIGHT
4000 / S-HD-4-4000	48	45	63	74	55	74	20 3/4	41 1/2	4 1/2	58,040	35'-0"	9'-2"	4'-0"	5'-3"
5000 / S-HD-4-5000	57	54	72	74	64	74	25 1/4	50 1/2	4 1/2	62,900	35'-0"	9'-2"	4'-9"	6'-0"
PC S-6000 / S-HD-4-6000	60 1/2	57 1/2	75 1/2	85	67 1/2	85	26 3/4	53 1/2	5	73,380	35'-0"	10'-1"	5'-0 1/2"	6'-3 1/2"